

12 Series *Spin-On Filter - with ΔP Indicator Option*


Flows up to: 70 GPM (Return) 25 GPM (Suction)
 Port Sizes:
 ▶ 1 1/4" NPTF
 ▶ 1 1/4" BSP
 ▶ 1 5/8" - 12 UN (SAE - 20)

Pressure: 200 PSI Max. Operating
Warning: 80 PSI ΔP max. without by-pass valve.


Temperature: Up to +250° F.
 Operating
 Applications: Petroleum based fluids only.
 Consult factory for synthetic fluids.



SPIN-ON FILTERS

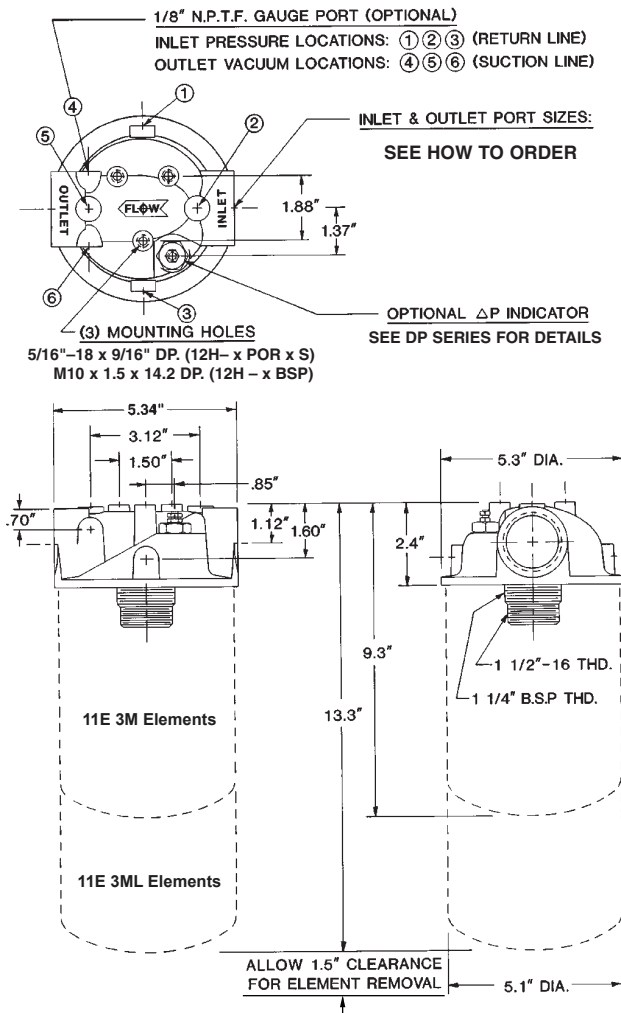


Average Pressure Drop Through Clean Filter Assembly With 150 SUS Oil At 105° F.

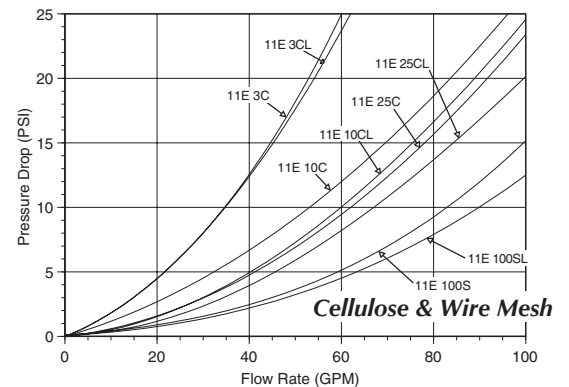

NOTE:

Please see 11 Series for replacement elements.

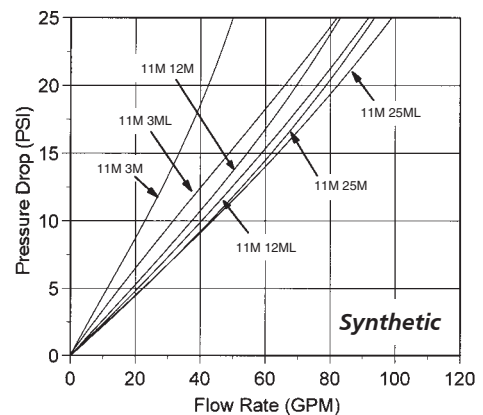

307 E Street, Hampton, VA 23661
 (PH) 757-327-0036 • (F) 757-327-0552
www.chasefiltercompany.com
info@chasefiltercompany.com

CHASE FILTERS
 AND COMPONENTS

Example Part Number

[illegible]