

10 Series *Spin-On Filter*

Flows up to: 25 GPM (Return) 9 GPM (Suction)
 Port Sizes:
 ▶ 3/4" NPTF
 ▶ 1 1/16" - 12 UN (SAE - 12)
 ▶ 3/4" BSP

Pressure:

250 PSI Max. Operating


Warning: 80 PSI ΔP max. without by-pass valve.

Temperature: Up to +250° F.



Operating Applications: Petroleum based fluids only.
 Consult factory for synthetic fluids.



SPIN-ON FILTERS

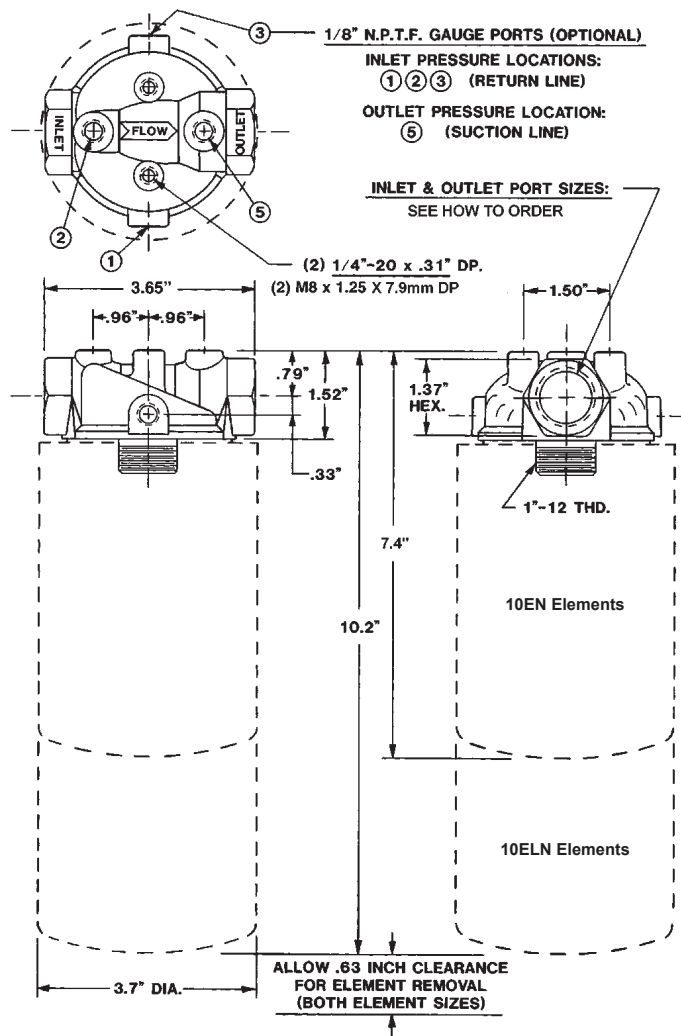

Average Pressure Drop Through Clean Filter Assembly With 150 SUS Oil At 105° F.

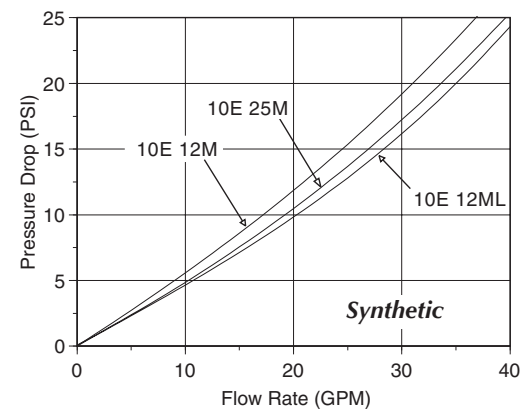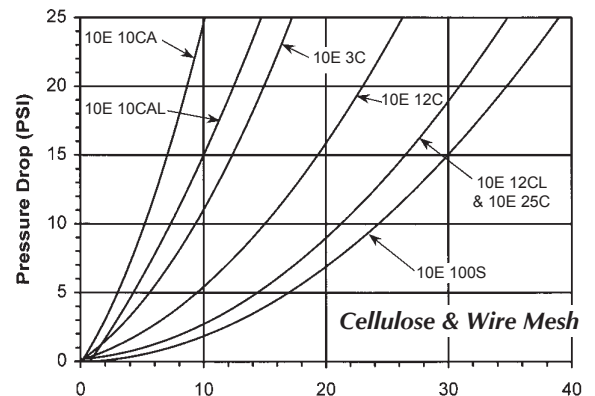

307 E Street, Hampton, VA 23661
 (PH) 757-327-0036 • (F) 757-327-0552
www.chasefiltercompany.com
info@chasefiltercompany.com

CHASE FILTERS
 AND COMPONENTS

Example Part Number

[illegible]