

30 SERIES BRASS INLINE FILTER



**RATED OPERATING PRESSURE:
6000 PSIG OXYGEN**

MANY PORTING OPTIONS AVAILABLE

FLOW CAPACITY: CV-1.0


SAFE, RELIABLE SIDE-SEAL DESIGN

**NEW: FLUTED SINTERED
10 MICRON REPLACEABLE ELEMENT**



- INCREASED SURFACE AREA
- INCREASED DIRT HOLDING CAPACITY
- INCREASED FLOW

Patent No: US 8,241,386 B2

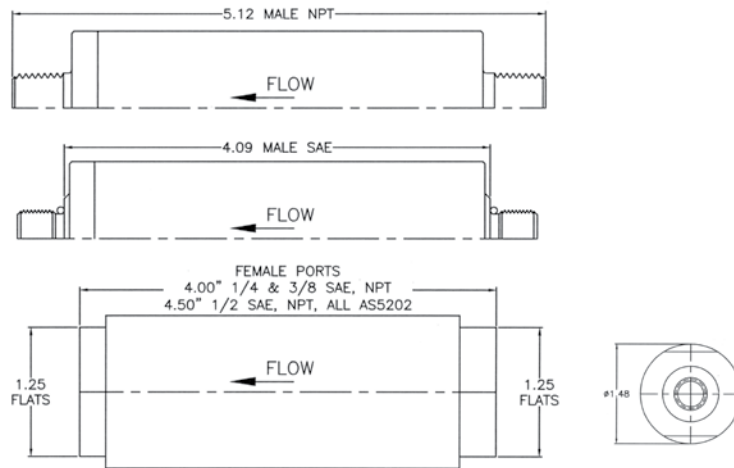

DESIGN HAS SUCCESSFULLY PASSED MODIFIED ASTM G175 PHASE 2 PROMOTED IGNITION TEST WITH 5000 PSIG OXYGEN

