


PART NO.	METER SIZE	A DIA.	B DIA.	C DIA.	MAT'L	
376J230U01	6	8-3/4	6	2	304 SST	125/150# ANS
376J230U02	8	11	8	2	304 SST	
376J230U03	10	13-3/8	9-1/2	2-1/4	304 SST	
376J230U04	12	16-1/8	11-9/16	2-7/16	304 SST	
376J230U05	14	17-3/4	13-1/2	2-5/8	304 SST	
376J230U06	16	20-1/4	15-1/4	2-5/8	304 SST	
376J230U07	18	21-5/8	17-3/8	2-5/8	304 SST	
376J230U08	20	23-7/8	19	2-13/16	304 SST	
376J230U09	24	28-7/8	23	2-7/8	304 SST	
376J230U10	30	34-3/4	29-3/4	3-1/2	304 SST	
376J230U11	36	41-1/4	35-3/4	4	304 SST	
376J230U12	42	48	41-3/4	4-1/2	304 SST	
376J230U13	48	54-1/2	47-3/4	5	304 SST	125/150# ANS
376J230U14	6	9-7/8	6	2	304 SST	
376J230U15	8	12-1/8	8	2	304 SST	
376J230U16	10	14-1/4	9-1/4	2-1/4	304 SST	
376J230U17	12	16-5/8	11-1/8	2-7/16	304 SST	
376J230U18	54	61	53-3/4	5-1/2	304 SST	
376J230U19	18	23-1/2	17-3/8	2-5/8	304 SST	
376J230U20	24	30-1/2	23	2-7/8	304 SST	
376J230U21	60	67-1/2	59-3/4	6	304 SST	
376J230U22	66	74-1/4	65	6	304 SST	
376J230U23	12	16-1/8	11-11/16	2-7/16	304 SST	150
376J230U24	14	19-1/8	13-5/8	2-5/8	304 SST	300

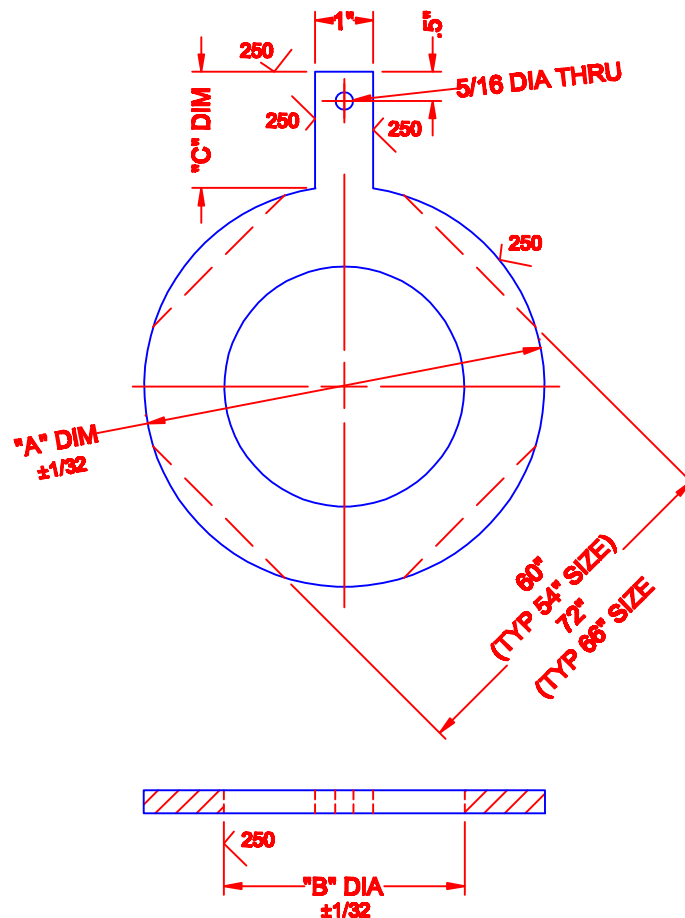

MATERIAL		 CHASE FILTERS & COMPONENTS	
FINISH			
ALL PARTS MUST BE CLEANED FOR OXYGEN SERVICE PER ASTM SPEC G88. GLOVES MUST BE WORN DURING PART HANDLING			
UNLESS OTHERWISE SPECIFIED: .01 ± .02 REMOVE ALL BURRS .001 ± .01 DIMENSIONS IN INCHES .001 / ASME Y14.5 ANGLE: 45° CORNER BREAKS .005-.008 FILLET RADI .005-.008 SURFACE ROUGHNESS: 125 THREAD: CLASS 2 THREAD LENGTHS ARE FULL THREAD DO NOT SCALE PRINTED DRAWING		SCALE: NTS CLT 17.10.01 PTE 17.10.01	DRAWN BY: CLT 17.10.01 APPROVED BY: PTE 17.10.01
DESCRIPTION			
GROUNDING RING			
CAGE CODE	PART NUMBER		SIZE
THIRD ANGLE PROJECTION	SHT. 1 OF 1		B

B	17.10.10	PTS	PER ECO 17-067
A	17.10.01	CLT	INITIAL DRAWING PER ECO 17-062
REV.	DATE	CHG BY	DESCRIPTION OF CHANGE
REVISION HISTORY			