



# 21 Series

## Mini In-Line Filters

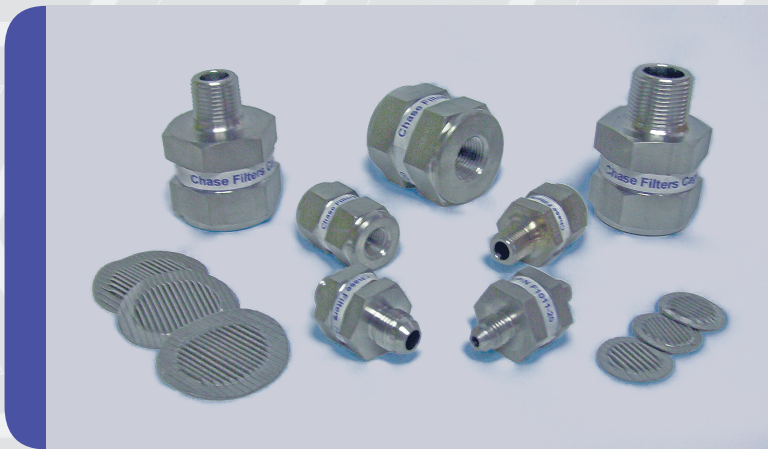

- 304 Stainless Steel 1" Hex 6,000 PSI & 1.75" Hex 3,000 PSI
- 316 Stainless Steel Pleated Disc
- Stainless Steel Wire Mesh Discs are Precision Pleated for Strength and an Increased Effective Filtration Area
- Various Micron Ratings Available from 2 to 300 Micron in Wire Mesh
- Temperatures Ranging from -425°F to +1000°F
- Economical Filters for: Test Stands, Meters, Gauges, Relief Valves, Pneumatic Systems, Hydraulic Systems, and Much More
- Ideal for Applications with Limited Space
- Custom Materials Available Upon Request
- Special Inlet and Outlet Porting Available
- Filters are Re-Cleanable by Various Methods

### MINI IN-LINE FILTERS

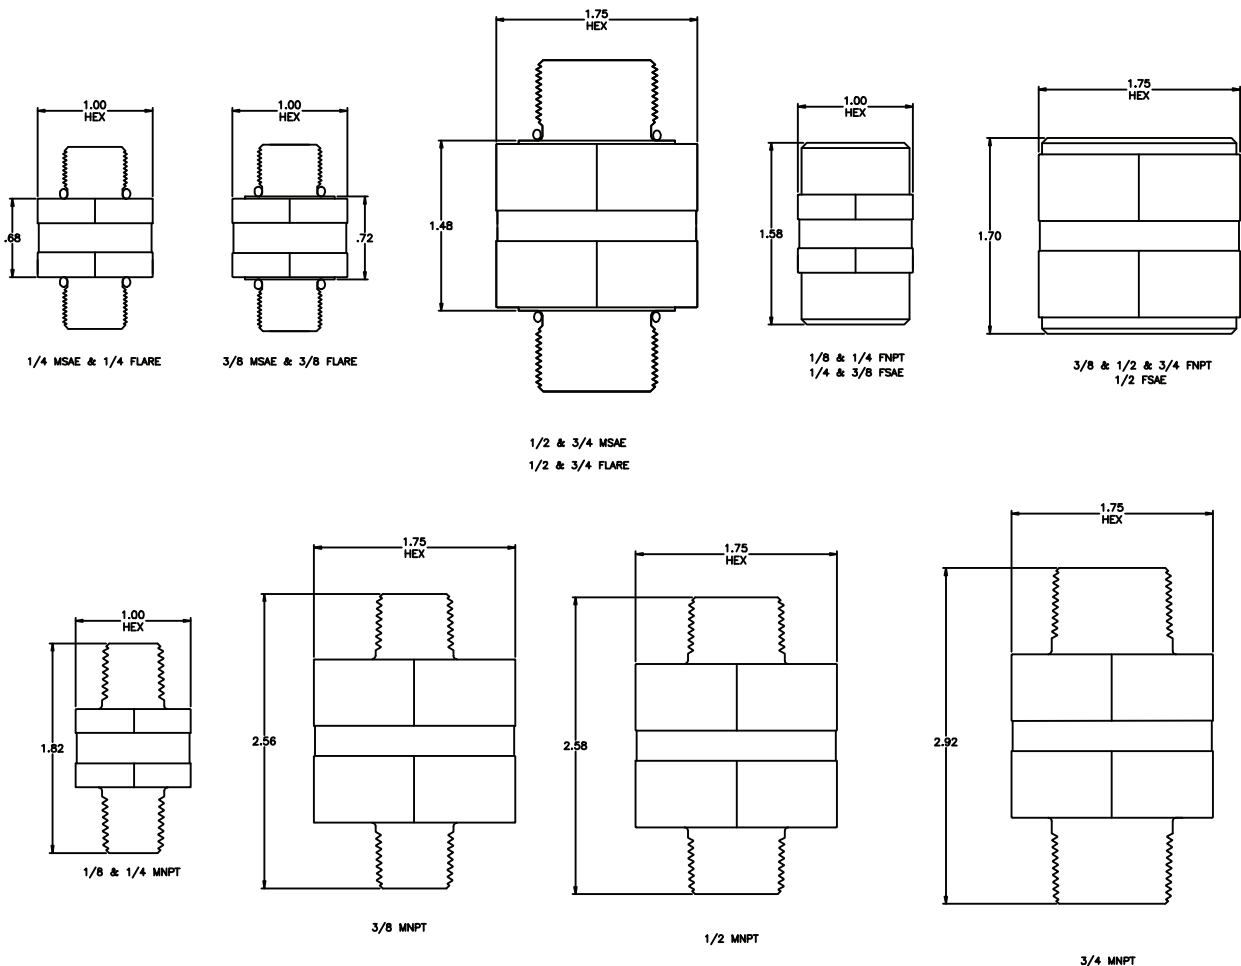

# 21 Series How to Order

## Example Part Number

|                        |                     |                   |                   | A    | B  | C | D  | E    | - | F     |
|------------------------|---------------------|-------------------|-------------------|------|----|---|----|------|---|-------|
|                        |                     |                   |                   | 21   | -  | 2 | P  | 2    | P | - 10S |
| <b>Section A</b>       | <b>Description</b>  | <b>Code</b>       |                   |      |    |   |    |      |   |       |
| Filter Series          | Mini-In-Line Welded | 21                | 21                |      |    |   |    |      |   |       |
| <b>Section B</b>       |                     |                   |                   |      |    |   |    |      |   |       |
| Inlet Port Size        | 1/8" – 1" Hex       | 2                 |                   |      | 2  |   |    |      |   |       |
|                        | 1/4" – 1" Hex       | 4                 |                   |      | 4  |   |    |      |   |       |
|                        | 3/8" – 1" Hex       | 6                 |                   |      | 6  |   |    |      |   |       |
|                        | 1/2" – 1.75" Hex    | 8                 |                   |      | 8  |   |    |      |   |       |
|                        | 3/4" – 1.75" Hex    | 12                |                   |      | 12 |   |    |      |   |       |
|                        | 1" – 1.75" Hex      | 16                |                   |      | 16 |   |    |      |   |       |
| <b>Section C</b>       |                     |                   |                   |      |    |   |    |      |   |       |
| Inlet Port Type        | Male SAE            | M                 |                   |      |    | M |    |      |   |       |
|                        | Male NPT            | N                 |                   |      |    | N |    |      |   |       |
|                        | Female NPT          | P                 |                   |      |    | P |    |      |   |       |
|                        | Female SAE J1926    | S                 |                   |      |    | S |    |      |   |       |
|                        | 37° Flare           | T                 |                   |      |    | T |    |      |   |       |
|                        | AS1098              | C                 |                   |      |    | C |    |      |   |       |
| <b>Section D</b>       |                     |                   |                   |      |    |   |    |      |   |       |
| Outlet Port Size       | 1/8"                | 2                 |                   |      |    |   | 2  |      |   |       |
|                        | 1/4"                | 4                 |                   |      |    |   | 4  |      |   |       |
|                        | 3/8"                | 6                 |                   |      |    |   | 6  |      |   |       |
|                        | 1/2"                | 8                 |                   |      |    |   | 8  |      |   |       |
|                        | 3/4"                | 12                |                   |      |    |   | 12 |      |   |       |
|                        | 1" – 1.75" Hex      | 16                |                   |      |    |   | 16 |      |   |       |
| <b>Section E</b>       |                     |                   |                   |      |    |   |    |      |   |       |
| Outlet Port Type       | Male SAE            | M                 |                   |      |    |   |    | M    |   |       |
|                        | Male NPT            | N                 |                   |      |    |   |    | N    |   |       |
|                        | Female NPT          | P                 |                   |      |    |   |    | P    |   |       |
|                        | Female SAE J1926    | S                 |                   |      |    |   |    | S    |   |       |
|                        | 37° Flare           | T                 |                   |      |    |   |    | T    |   |       |
|                        | AS1098              | C                 |                   |      |    |   |    | C    |   |       |
| <b>Section F</b>       | <b>Material</b>     | <b>Micron/Nom</b> | <b>Micron/Abs</b> |      |    |   |    |      |   |       |
| Filter Size / Material | 316 SSTL            | 2                 | 10                | 10S  |    |   |    | 10S  |   |       |
|                        | 316 SSTL            | 5                 | 18                | 18S  |    |   |    | 18S  |   |       |
|                        | 316 SSTL            | 10                | 25                | 25S  |    |   |    | 25S  |   |       |
|                        | 316 SSTL            | 20                | 40                | 40S  |    |   |    | 40S  |   |       |
|                        | 316 SSTL            | 40                | 75                | 75S  |    |   |    | 75S  |   |       |
|                        | 316 SSTL            | 75                | 100               | 100S |    |   |    | 100S |   |       |
|                        | 316 SSTL            | 100               | 150               | 150S |    |   |    | 150S |   |       |
|                        | 316 SSTL            | 200               | 300               | 300S |    |   |    | 300S |   |       |



**info@chasefiltercompany.com • 757-327-0036**

**Please visit: [www.chasefiltercompany.com](http://www.chasefiltercompany.com) to download 3D Models & Step Drawings**