



- ▶ 304 Stainless Steel 1" Hex & 1.75" Hex
- ▶ 316 Stainless Steel Pleated Disc
- ▶ Stainless Steel Wire Mesh Discs are Precision Pleated for Strength and an Increased Effective Filtration Area
- ▶ Various Micron Ratings Available from 2 to 300 Micron in Wire Mesh and .2 to 200 Micron in Sintered Metal
- ▶ Temperatures Ranging from -320°F to +550°F
- ▶ Economical Filters for: Test Stands, Meters, Gauges, Relief Valves, Pneumatic Systems, Hydraulic Systems, and Much More
- ▶ Ideal for Applications with Limited Space
- ▶ Custom Materials Available Upon Request
- ▶ Special Inlet and Outlet Porting Available
- ▶ Filters are Re-Cleanable by Various Methods

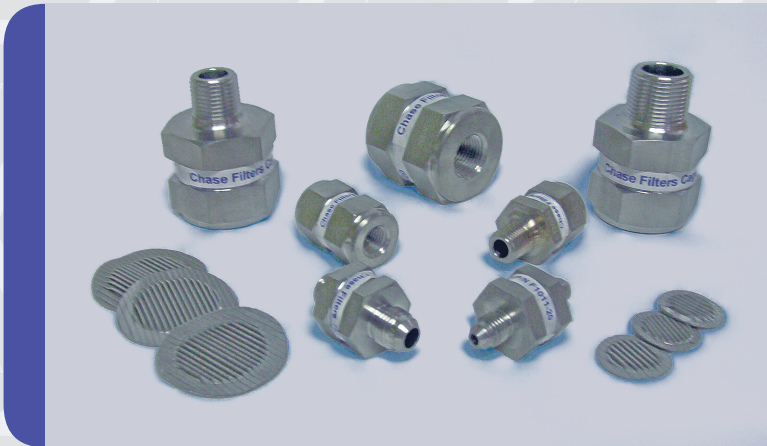

MINI IN-LINE FILTERS

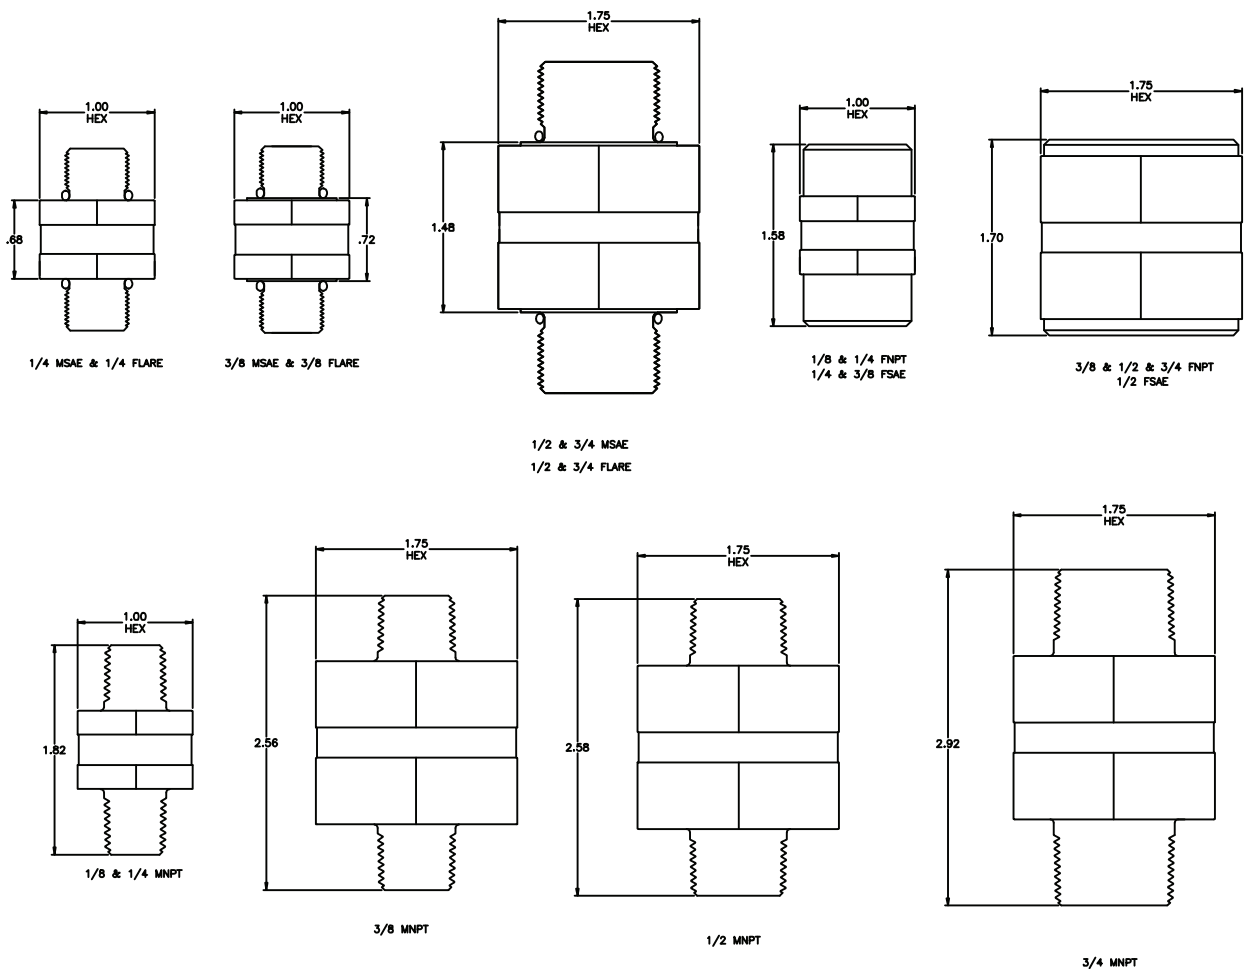

21 Series How to Order

Example Part Number

				A	B	C	D	E	F		
				21	-	2	P	2	P	-	10S
Section A	Description	Code									
Filter Series	Mini-In-Line Welded	21	21								
Section B											
Inlet Port Size	1/8"	2			2						
	1/4"	4			4						
	3/8"	6			6						
	1/2"	8			8						
Section C											
Inlet Port Type	FNPT	P				P					
	MNPT	N				N					
	FSAE	S				S					
	MSAE	M				M					
	37° Flare	T				T					
	AS5202	A				A					
	O-Ring Face Seal	F				F					
Section D											
Outlet Port Size	1/8"	2					2				
	1/4"	4					4				
	3/8"	6					6				
	1/2"	8					8				
	3/4"	12					12				
Section E											
Inlet Port Type	FNPT	P							P		
	MNPT	N							N		
	FSAE	S							S		
	MSAE	M							M		
	37° Flare	T							T		
	AS5202	A							A		
	O-Ring Face Seal	F							F		
Section F											
Filter Size / Material	316 SSTL	2	10	10S					10S		
	316 SSTL	5	18	18S					18S		
	316 SSTL	10	25	25S					25S		
	316 SSTL	20	40	40S					40S		
	316 SSTL	40	75	75S					75S		
	316 SSTL	75	100	100S					100S		
	316 SSTL	100	150	150S					150S		
	316 SSTL	200	300	300S					300S		
	316 Sintered SSTL	0.05	0.2	1PS					1PS		
	316 Sintered SSTL	0.2	0.7	2PS					2PS		
	316 Sintered SSTL	0.3	2	3PS					3PS		
	316 Sintered SSTL	0.8	5	4PS					4PS		

